


Small Permanent Magnets

Flat Gripper Magnets without threaded bush

Flat gripper magnets with galvanized case.

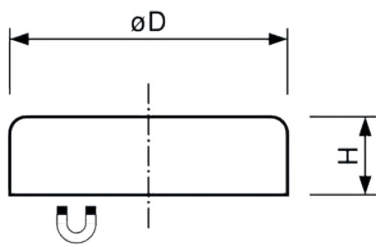

Applications

- ☑ 500 Fe:
Material Ferrit;
max. admissible temperature 200°C
- ☑ 500 Co:
Material Cobalt-Samarium;
max. admissible temperature 200°C
- ☑ 500 Nd:
Material Neodymium;
max. admissible temperature 80°C

Technical data

	Dimensions [mm]		Adhesive force	Weight	Item no.	Price
	D	H	[N]	[g]		
500 Fe	10	4.5	4	2	238	1,15
	13	4.5	10	3	239	1,22
	16	4.5	18	5	240	1,27
	20	6.0	30	10	241	1,29
	25	7.0	40	18	242	1,38
	32	7.0	80	29	243	1,48
	40	8.0	125	55	244	2,05
	50	10.0	220	102	245	2,44
	63	14.0	350	226	246	4,60
	80	18.0	600	468	247	8,30
500 Co	100	22.0	900	915	9601	22,00
	125	26.0	1300	1680	35	64,00
	6	4.5	5	1	26191	1,95
	8	4.5	11	2	26192	2,22
	10	4.5	20	3	26193	2,66
	13	4.5	40	4	26194	2,90
	16	4.5	60	7	26195	3,80
	20	6.0	90	14	26196	4,90
500 Nd	25	7.0	150	26	26197	10,99
	32	7.0	220	42	26198	13,50
	6	4.5	5	1	26169	1,41
	8	4.5	13	2	26170	1,61
	10	4.5	25	2.5	26171	1,84
	13	4.5	60	4	26172	1,99
	16	4.5	95	6	26179	2,30
	20	6.0	140	14	26180	3,40
25	7.0	200	25	26181	5,09	
32	7.0	350	41	26182	6,80	

Prices are subject to change