

ASO 600-ASL


Deburring machine for Contours

The small, compact deburring machine mills or rounds edges precisely, safely and with ease. It leaves chatter-free chamfers and radii on angular and round workpieces made of a wide variety of materials. Its universality makes it unique.



Applications

- ▶ Minimum workpiece thickness 1 mm
- ▶ Can be used for steel, hardened steel, aluminium, brass, copper, plastic, from soft plastic to acrylic glass, wood and much more
- ▶ Chamfering or rounding of external and internal contours
- ▶ For continuous operation

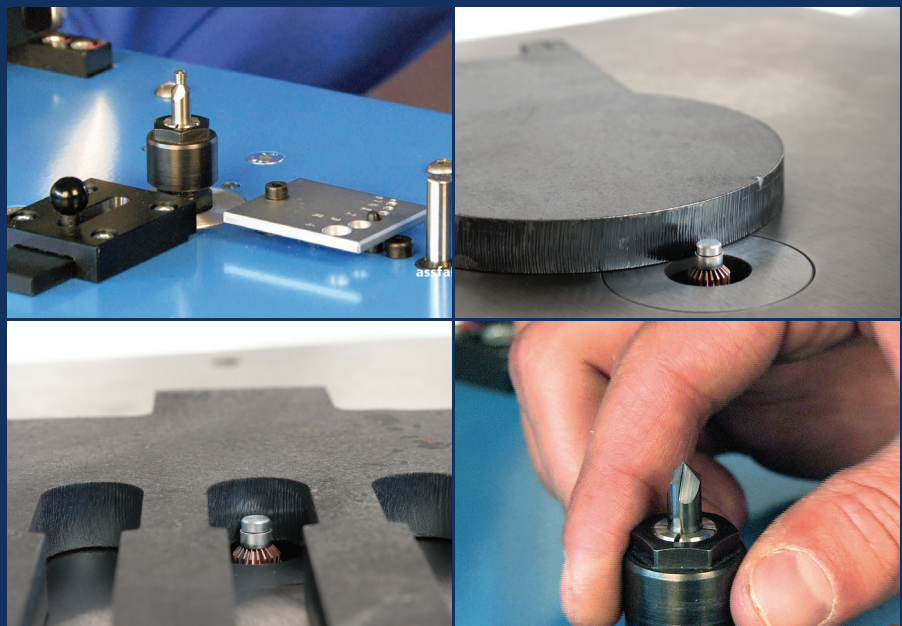



Professional advantages

- ▶ Brush-less motor for continuous operation
- ▶ Tool change within a few seconds
- ▶ Zero point clamping
- ▶ Extraction socket

ASO 600-ASL
with stop ruler



Further accessories can be found
in our [Accessory Catalogue](#).



Features

- ✔ Compact, handy tabletop unit next to the CNC milling- and turning machine
- ✔ Precise chamfer adjustment
- ✔ Chamfer angle can be changed due to contour cutter with different point angles
- ✔ Fast tool change with zero point clamping
- ✔ Hardened table with extraction socket

Options


- ✔ Prism attachment for straight edges
- ✔ Guide finger for the use of tapered contour cutters
- ✔ Extraction device with automatic switch-on
- ✔ Special cutters on request

Delivery contents

- ✔ Stop ruler
- ✔ Open-ended wrench SW 17
- ✔ Insert ring with borehole \varnothing 12 mm
- ✔ Collet \varnothing 6 mm
- ✔ Union nut
- ✔ Operating manual

Technical data

		ASO 600-ASL
Motor		0.25 kW 9,000-21,000 rpm
Energy		230 V, 50/60 Hz
Maximum chamfer width		3 mm
Guide ball bearing		min. \varnothing 3 mm
Dimensions (LxWxH)		280 x 300 x 205 mm
Weight		21.3 kg
Item no.		68674

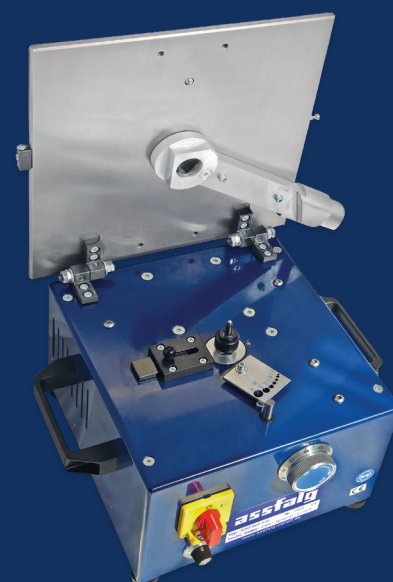

ASO 600-ASL